

## What Is the Battery Charger?

The CK1 Battery Charger (P/N 073660) is an accessory for the CK1 Handheld Computer. You use the battery charger to charge the CK1 battery (P/N 073659).

This guide explains how to install and use the battery charger. Before using the battery charger, please read this guide thoroughly and save it for future reference.

### What You Need

To use the battery charger, you need one of the following AC power supplies:

Region	Part Number
Australia	073855
Europe	073853
United Kingdom	073852
United States	073854



Caution

**You must use the appropriate Intermec power supply with this device or equipment damage may occur.**

**Attention: Vous devez utiliser la source d'alimentation Intermec adéquate avec cet appareil sinon vous risquez d'endommager l'équipement.**


## Charging Batteries

You can charge the CK1 battery (P/N 073659) in the CK1 battery charger. The battery charger fully charges the battery in about 5 hours.

### To charge batteries

- With the contacts on the battery aligned with the contacts on the charger, slide the battery into the slot.

The Charging light for that slot changes to green or red to indicate the battery charge status. See "Understanding the Lights" to learn what the Charging light colors mean.

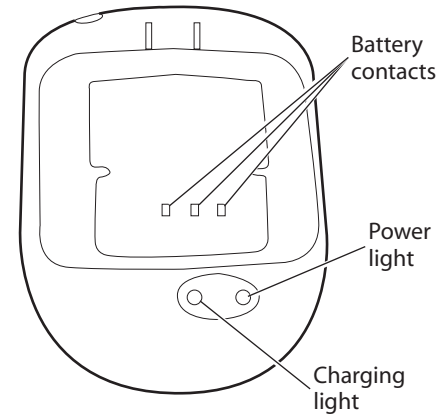


## Understanding the Lights

This table explains what the different colors of the Charging and Power lights mean.

Light	Color	Description
Charging	Red	The battery charger is charging the battery.
	Green	The battery is fully charged.
Power	Off	The battery charger is not receiving power. Make sure the AC power supply is connected properly.
	Green	The battery charger is connected to AC power and is ready to charge.

## Installing the Battery Charger

- 1 Place the battery charger on a flat, stable, and clean surface that is within 1.5 m (5 ft) of an AC power outlet.
- 2 Connect the AC power supply to the power supply connector on the battery charger and to an AC power outlet. The Power light turns on, showing that the battery charger is ready to use.

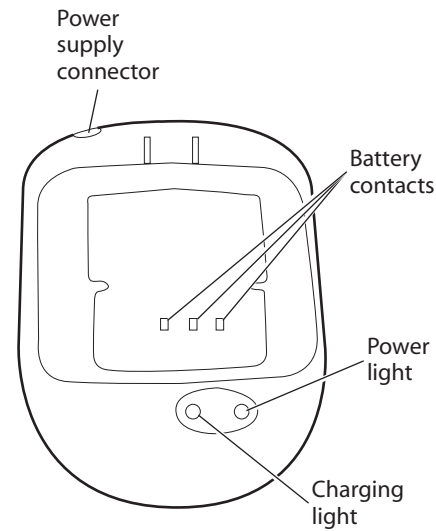

**To prevent fire or electric shock, do not expose the battery charger to rain or moisture.**

**Avertissement: Pour éviter des risques d'incendie ou de choc électrique, ne pas exposer le chargeur de batterie à la pluie ou l'humidité.**

## Specifications

Input Voltage:	≡ 6V
Current:	400 mA
Operating Temperature:	5°C to 40°C (41°F to 104°F)
Storage Temperature:	-20°C to 70°C (-4°F to 158°F)
Operating Humidity:	0% to 95% non-condensing relative humidity

## For More Information

You may need additional information when working with the CK1 and battery charger in a data collection system. Please visit our web site at [www.intermec.com](http://www.intermec.com) to download PDF files of our current manuals. To order printed versions of the Intermec manuals, contact your local Intermec representative or distributor.


CK1 Battery Charger Quick Start Guide



P/N 073776-001

**Intermec**

## Quick Start Guide

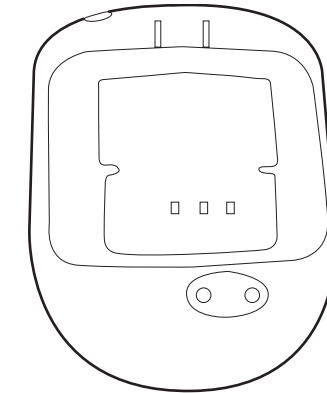

## CK1 Battery Charger

**Intermec**  
Technologies Corporation

6001 36th Avenue West  
Everett, WA 98203  
U.S.A.

[www.intermec.com](http://www.intermec.com)

© 2004 Intermec Technologies Corp.  
All Rights Reserved