




Warning
 Take care when attaching the handle. The handle tips are sharp and may cause bodily harm.

Avertissement
 Faites attention lorsque vous attachez cette poignée. Les extrémités de la poignée sont pointues et peuvent causer des blessures corporelles.

Intermec
 Instructions



**243X and
 5020 Handle**

Intermec
 Technologies Corporation

6001 36th Avenue West
 P.O. Box 4280
 Everett, WA 98203-9280

© 2001 Intermec
 All Rights Reserved

Part No. 068980-002




068980-002



Warning
 Take care when attaching the handle. The handle tips are sharp and may cause bodily harm.

Avertissement
 Faites attention lorsque vous attachez cette poignée. Les extrémités de la poignée sont pointues et peuvent causer des blessures corporelles.

Intermec
 Instructions



**243X and
 5020 Handle**

Intermec
 Technologies Corporation

6001 36th Avenue West
 P.O. Box 4280
 Everett, WA 98203-9280

© 2001 Intermec
 All Rights Reserved

Part No. 068980-002



068980-002

243X and 5020 Handle Instructions

Use these instructions to install the handle on the Trakker Antares® 243X hand-held terminal or the 5020 Data Collection PC™.

Installing the Handle

1. Remove the handstrap. If you have a 243X, you must remove the handstrap screw to remove the handstrap.
2. Position the handle as shown.
3. Tighten the screw so that the handle does not move on the 243X or 5020. If you have a torque screwdriver, tighten the screw to 3.4 N-m (30 lb-in) maximum.



Note: Do not overtighten the screw in the handle. You may damage the threads or cause the trigger mechanism to jam.


Maintaining the Handle

You may need to periodically clean the trigger mechanism, especially in dusty environments. Grit between the small magnet (in the end of the trigger mechanism lever) and the 243X or 5020 case can cause the trigger to jam.

To clean the handle

1. Unscrew the handle and remove it from the 243X or 5020.
2. Clean the surface of the 243X or 5020 and magnet with a damp cloth.
3. Use adhesive tape to remove any metal shavings from the magnet surface.
4. Install the handle.

Installing the Handle

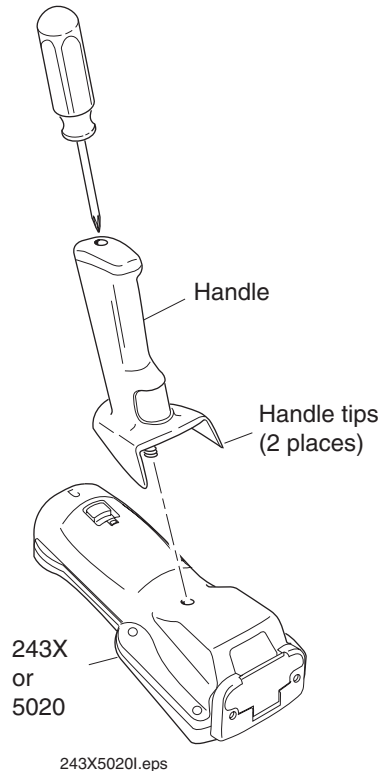

243X and 5020 Handle Instructions

Use these instructions to install the handle on the Trakker Antares® 243X hand-held terminal or the 5020 Data Collection PC™.

Installing the Handle

1. Remove the handstrap. If you have a 243X, you must remove the handstrap screw to remove the handstrap.
2. Position the handle as shown.
3. Tighten the screw so that the handle does not move on the 243X or 5020. If you have a torque screwdriver, tighten the screw to 3.4 N-m (30 lb-in) maximum.



Note: Do not overtighten the screw in the handle. You may damage the threads or cause the trigger mechanism to jam.

Maintaining the Handle

You may need to periodically clean the trigger mechanism, especially in dusty environments. Grit between the small magnet (in the end of the trigger mechanism lever) and the 243X or 5020 case can cause the trigger to jam.

To clean the handle

1. Unscrew the handle and remove it from the 243X or 5020.
2. Clean the surface of the 243X or 5020 and magnet with a damp cloth.
3. Use adhesive tape to remove any metal shavings from the magnet surface.
4. Install the handle.

Installing the Handle

