


Attaching a Wrist Strap

To use a wrist strap (not supplied), install the handle on the CK1 and attach the strap to the attachment point on the bottom of the handle.

Attachment
point

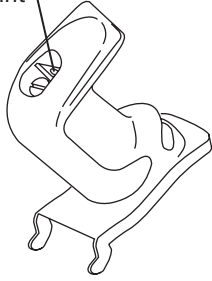

CK1 Handle Instructions



P/N 073774-001

Intermec

Technologies Corporation

6001 36th Avenue West

Everett, WA 98203

U.S.A.

www.intermec.com

© 2004 Intermec Technologies Corp.
All Rights Reserved

Intermec

Instructions



CK1 Handle

Installing the Handle

Use these instructions to install the handle on a CK1 Handheld Computer.



Note: If there is a belt holder attachment installed on the CK1, you must remove the belt holder attachment before proceeding.

To install the handle


- 1 Position the handle as shown, and place the handle tabs in the handle slots.
- 2 Tighten the screw so the handle does not move. If you have a torque screwdriver, tighten the screw to 1.26 N-m (12 lb-in) maximum.



Caution

Do not overtighten the handle screw. You may damage the threads or cause the trigger mechanism to jam.

Attention: Ne pas trop serrer la vis de la poignée. Vous risquez d'endommager les filets ou de bloquer le mécanisme de déclenchement.

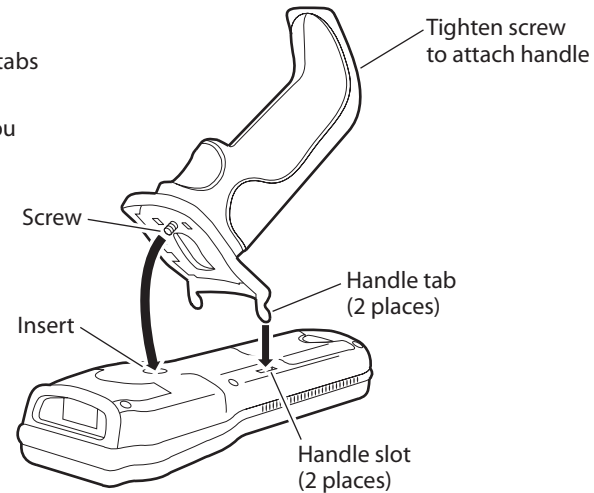

Cleaning the Handle

You may need to clean the handle periodically, especially in dusty environments.

To clean the handle

- 1 Remove the handle screw and take the handle off the CK1.
- 2 Use a damp cloth to clean the bottom surface of the CK1 and the mounting surface on the handle.
- 3 Press and hold the trigger to expose the magnet. Use adhesive tape to remove any metal shavings from the magnet surface.

