


## To put on the holster and shoulder strap

- 1 Slide the holster to the appropriate side of the belt.
- 2 Place the shoulder strap over your head so that the holster is on the side of your body where you want to use it.
- 3 Adjust the shoulder strap so that the belt strap is at your waist.
- 4 With the holster on the outside of your thigh, buckle the belt around your waist.



- 5 Adjust the belt so it is snug and comfortable for you, and secure the loose end of the belt in the J-hook.
- 6 Buckle the leg strap around your thigh.
- 7 Adjust the leg strap so it is snug and comfortable for you.

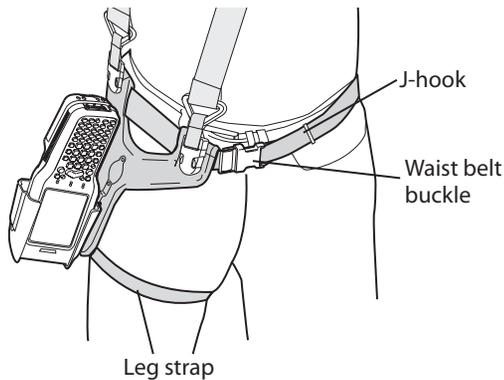

Technologies Corporation

6001 36th Avenue West

Everett, WA 98203

U.S.A.

[www.intermec.com](http://www.intermec.com)

© 2004 Intermec Technologies Corp.

All Rights Reserved

## Holster and Shoulder Strap Instructions




P/N 074131-001



## Holster and Shoulder Strap Instructions

The holster and shoulder strap provide you with a convenient way to carry the CK31 Handheld Computer or 751G Color Mobile Computer when you are not using it.

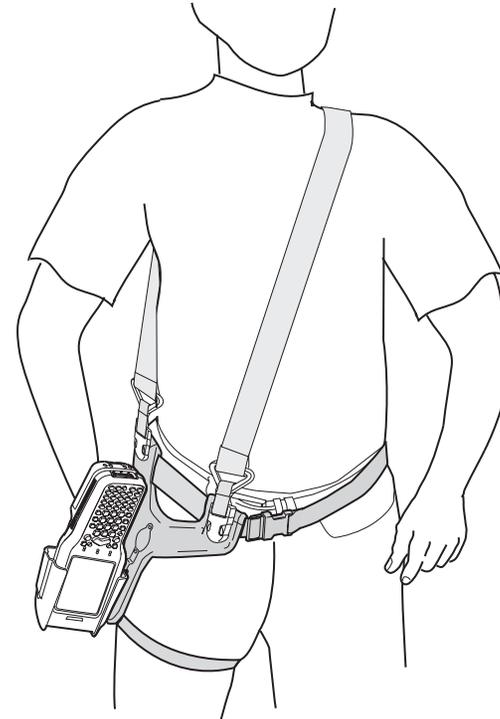

**Holster and Shoulder Strap:** The holster and shoulder strap allow you to use it on your left or right side whether or not your computer has a handle, serial adapter, or CAC module installed. You can detach the shoulder strap if necessary.

You can configure the holster to be worn on either side of your body. The holster can hold a CK31 or 751G with a handle, a CAC reader, or a serial adapter installed.



**Note:** The illustrations in this guide show the CK31 for reference. The CK31 and the 751G use the same shoulder strap, but they use different holsters.


If you do not have a handle attached to your CK31 or 751G, you can insert it into the holster without having to move the position of the holster.

To configure the holster, you need this tool:


- #2 Phillips screwdriver

### To configure the holster


- 1 Remove the Phillips screw from the bottom of the mounting bar.

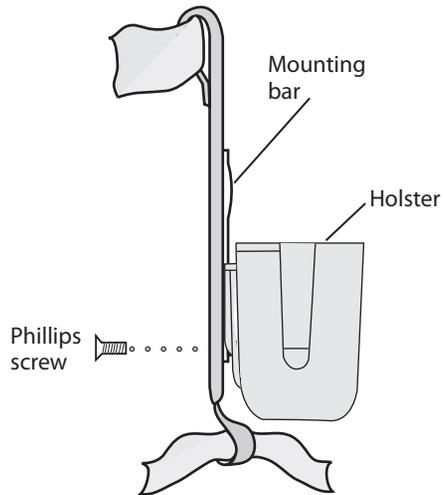

- 2 Slide the holster down and off of the mounting bar.

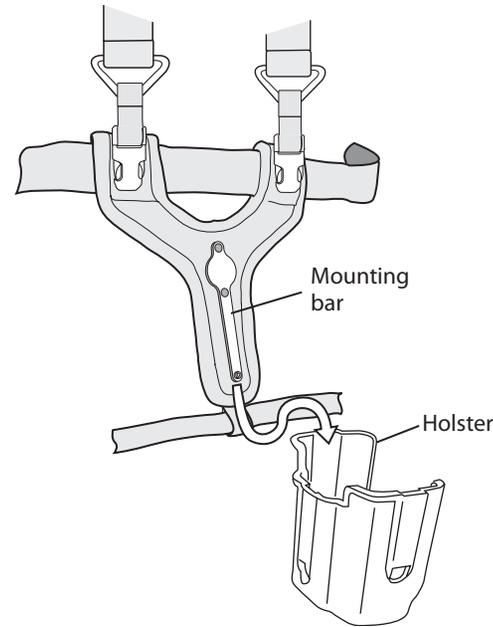

- 3 Depending on whether you want to wear the holster on the right or left side, insert the holster on the mounting bar according to the next illustration.

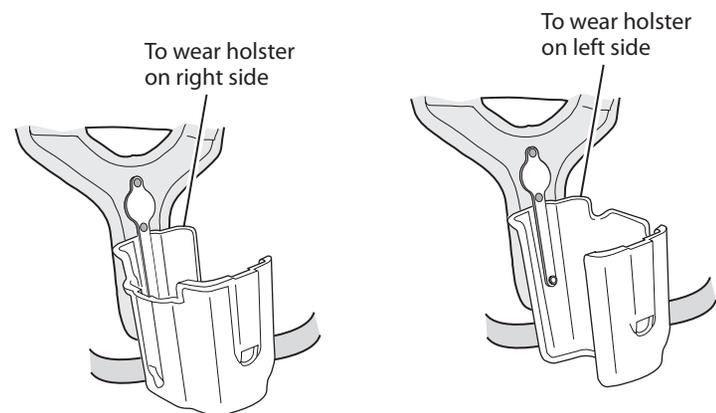

- 4 Replace the screw in the bottom of the mounting bar.