


## Environmental Specifications

Operating Temperature: 0°C to +40°C (+32°F to +104°F)  
Storage Temperature: -30°C to +70°C (-22°F to +158°F)  
Relative Humidity: 5% to 95%

**Intermec**

## Instructions

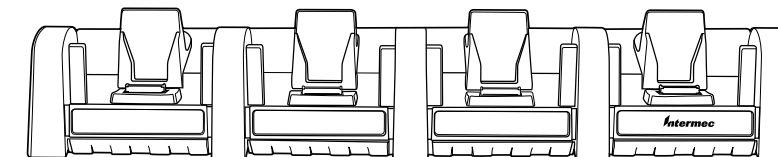

CK60 Charge-Only Multidock (AD4) Instructions



P/N 962-040-019D

**Intermec**

Worldwide Headquarters  
6001 36th Avenue West  
Everett, Washington 98203  
U.S.A.

tel 425.348.2600

fax 425.355.9551

[www.intermec.com](http://www.intermec.com)

© 2010 Intermec Technologies Corporation. All rights reserved.



## CK60 Charge-Only Multidock (AD4)

## Out of the Box

The Intermec CK60 Charge-Only Multidock (Model AD4) allows up to four CK60 Handheld Computers to be charged at the same time.

The CK60 charge-only multidock shipping box should contain these items:

- CK60 Charge-Only Multidock
- CK60 Charge-Only Multidock Instructions
- Product Warranty Card
- Compliance Insert

### What you need

To use the CK60 charge-only multidock you need:

- an Intermec-approved power supply.
- an AC power cord.

You need to purchase the appropriate power cord and power supply for your location. For more information contact your Intermec sales representative.



Caution

**You must use the appropriate power supply with this device or equipment damage may occur.**


## Shelving Considerations

For building your shelving, keep in mind the dimensions of the dock. Shelving needs to include enough room above the charge-only multidock for inserting the CK60 handheld computer and behind the charge-only multidock for connecting the cables.

## Charging Time for CK60 Handheld Computers


Your CK60 handheld computers fully charge within four hours. The charging status of your handheld computer is observed on the Battery Status LED on your CK60 handheld computer keypad.

## CK60 Charge-Only Multidock Features

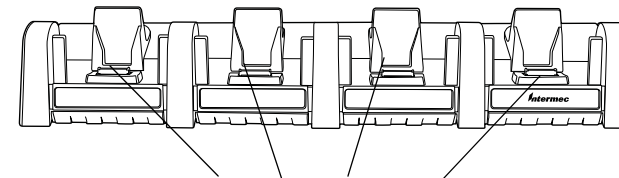

CK60 handheld computer bays

**CK60 Charge-Only Multidock Front View**

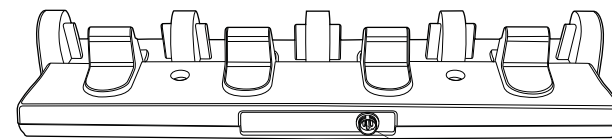

Power supply connector

**CK60 Charge-Only Multidock Rear View**