

CK1 Modem Dock



Quick Start Guide



What Is the Modem Dock?

The modem dock is an accessory for the CK1 Handheld Computer. You can use the modem dock to:

- power the CK1.
- charge the battery while it is in a CK1.
- transfer data and applications through a modem connection.

This guide explains how to install and use the modem dock. Before using the modem dock, please read this guide thoroughly and save it for future reference.

Intermec
Technologies Corporation
6001 36th Avenue West
Everett, WA 98203
U.S.A.
www.intermec.com
© 2004 Intermec Technologies Corp.
All Rights Reserved



CK1 Modem Dock Quick Start Guide
P/N 073773-001



To prevent fire or electric shock, do not expose the device to rain or moisture.
Attention: Pour éviter des risques d'incendie ou de choc électrique, ne pas exposer l'appareil à la pluie ou l'humidité.

Input Voltage: = 9V
Current: 1000 mA
Operating Temperature: 5°C to 40°C (41°F to 104°F)
Storage Temperature: -20°C to 70°C (-4°F to 158°F)
Operating Humidity: 0% to 95% non-condensing relative humidity

Specifications

What You Need

To use the modem dock, you need:

- modem cable (P/N 073664) (included).
- one of the following power supplies. To purchase a power supply, contact your local Intermec representative.

Region	Part Number
Australia	073859
Europe	073857
United Kingdom	073856
United States	073858




You must use the appropriate Intermec power supply with this device or equipment damage may occur.


Attention: Vous devez utiliser la source d'alimentation Intermec adéquate avec cet appareil sinon vous risquez d'endommager l'équipement.

Installing the Modem Dock

- 1 Place the modem dock on a flat, stable, and clean surface that is within 1.5 m (5 ft) of an AC outlet.
- 2 Connect the AC power supply to the power connector on the back of the modem dock, and then connect the power supply to an AC power outlet. The green Power light turns on. The modem dock is now ready to charge a battery in a CK1. The modem dock fully charges the battery in 4 hours.
- 3 (Optional) Connect the modem cable.

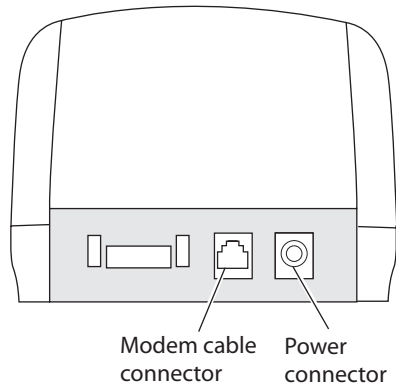


- 4 Place the CK1 in the modem dock.

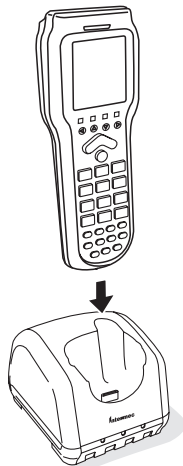

- 5 Configure the phone connection on the CK1. For help, see the *CK1 Handheld Computer User's Manual* (P/N 073769).

Understanding the Lights

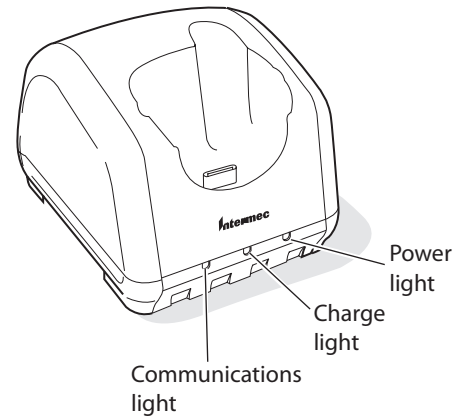

This table explains the different colors of the Communications, Charge, and Power lights.

Light	Color	Description
Communications	Off	The CK1 is not communicating. Make sure the modem cable is connected properly and the CK1 is configured properly.
	Flashing green	The CK1 is communicating through the phone connection.
Charge	Red	The modem dock is charging the battery.
	Green	The battery is fully charged.
Power	Off	The modem dock is not receiving power. Make sure the AC power supply is connected properly.
	Green	The modem dock is connected to AC power and is ready to charge.

For More Information

You may need additional information when working with the dock and CK1 in a data collection system. Please visit our web site at www.intermec.com to download PDF versions of our current manuals. To order printed versions of the Intermec manuals, contact your local Intermec representative or distributor.