

Specifications

Environmental

Operating Temperature: -20°C to +50°C (-4°F to +122°F)
Storage Temperature: -30°C to +70°C (-22°F to +158°F)
Relative Humidity: 5% to 95%

Serial RS-232 DB9M Connector Pinouts

Pin Number	Signal Name	I/O to Computer	Description
1	DCD	I	RS-232 Data carrier detect
2	RXD	I	RS-232 Receive data
3	TXD	O	RS-232 Transmit data
4	DTR	O	RS-232 Data terminal ready
5	GND	PWR	Signal Ground

Serial RS-232 DB9M Connector Pinouts (continued)

Pin Number	Signal Name	I/O to Computer	Description
6	DSR	I	RS-232 Data set ready
7	RTS	O	RS-232 Request to send
8	CTS	I	RS-232 Clear to send
9	PWR_OUT	PWR	5VDC 0.5 A To power external devices
DB9 Shell	C-GND	PWR	Chassis Ground

CK60 Serial Snap-On Adapter (AA5) Instructions



P/N 962-032-012C



Worldwide Headquarters
6001 36th Avenue West
Everett, Washington 98203
U.S.A.


tel 425.348.2600
fax 425.355.9551

www.intermec.com

© 2010 Intermec Technologies Corporation. All rights reserved.



Instructions

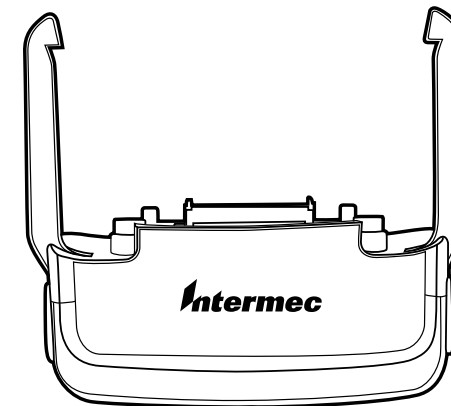

CK60 Serial Snap-On Adapter (AA5)

Out of the Box

After you remove the CK60 Handheld Computer Snap-On Serial Adapter (Model AA5) from its shipping box, save the box and packing material in case you need to ship or store the computer. The Serial Adapter shipping box should contain these items:

- CK60 Handheld Computer snap-on serial adapter
- CK60 serial adapter instructions
- Compliance insert

The serial snap-on adapter allows quick and easy attachment of the serial cable to the CK60 handheld computer. Two metal guides ensure proper alignment of the adapter to the handheld computer; spring clips hold the adapter securely in place.


The serial adapter provides screw locks to attach either a serial cable or a serial bar code scanner.

A power connector on the serial adapter allows connection of an external power supply is provided to the CK60 without removing the adapter.

Output power (500 mA @ 5V) on Pin 9 of the serial connector powers selected Intermec handheld scanners.

Compatible scanners: 1551, 1553, 1555, 1800 Series, and 1470 Intermec scanners.

Cable required P/N 3-604032-06

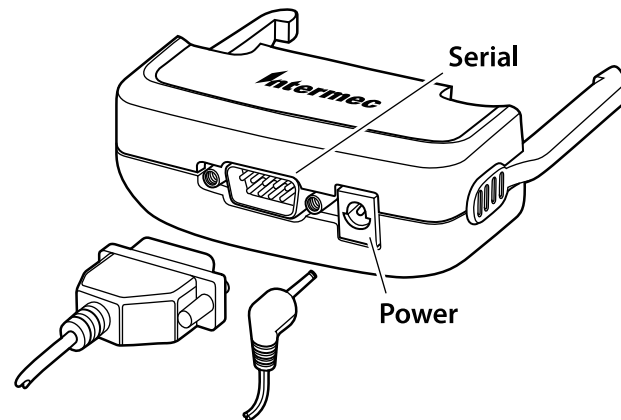

You must remove the serial adapter from the CK60 to insert the handheld computer into a dock.

To attach the serial adapter:

- Align metal clips with guides on either side of the CK60 and press firmly. The adapter latches into place.

To remove the serial adapter:

- Squeeze the finger grips on both sides of the serial adapter to disengage clips and pull the serial adapter away from the handheld computer.

CK60 Serial Adapter Features

