

Manual
Supplement

**730IS
Mobile
Computer**

730 Intrinsically Safe (730IS) Mobile Computer

Important Operating Instructions

The Model 730IS Mobile Computer has been qualified by the Underwriters Laboratories Inc., to the requirements of the USA and Canada for use in Class I, Division 1, Groups C and D; Class II, Division 1, Groups F and G locations; and Class III Division 1. It has a T4 temperature code..

Warnings and Cautions



Warning

Explosion Hazard-Substitution of components may impair suitability for Class I, Class II, and Class III Division 1 locations.



Note: This unit has no operator replaceable parts other than the battery pack and SD Card. Repair of the 730IS Mobile Computer must be performed by trained Intermec service personnel.



Warning

Explosion Hazard-Batteries must only be changed or charged in an area known to be non-hazardous. Use Intermec battery pack p/n: 318-011-006 only.



Note: From time to time additional battery packs may be added to the qualifications of the 730IS. Contact your local Intermec representative if battery pack (p/n: 318-011-006) is no longer available as a replacement battery pack.



Caution

The battery pack used in this device may present a fire or chemical burn hazard if mistreated. Do not disassemble, heat above 100°C (212°F) or incinerate. Dispose of used battery packs promptly. Keep away from children.

The following additional warnings and cautions must be observed for the safety of the operator and others in potentially hazardous locations:

- The 730IS must only be used when the ambient temperature is between -20°C and +40°C (-4°F and +104°F).
- Use only Intermec part number 715-370-001 Secure Digital memory card while in potentially hazardous locations. This card must not be removed or changed while in the hazardous location.

Battery Pack Removal


For maximum effectiveness it is important to leave the main battery installed in your 730IS Mobile Computer even if it is discharged. **If the main battery is removed, it should be replaced within 10 minutes to avoid the possibility of data loss. Before removing the battery ensure that your 730IS Mobile Computer is in *sleep* mode. Not doing this could result in a loss of data.**

730IS Hand Strap

Install the hand strap and docking connector cover as shown in the following illustration. When you need to gain access to the connector loosen the two thumb screws to remove the connector cover.



Note: It's recommended that the docking connector cover be installed whenever your 730IS Mobile Computer is not in the dock.

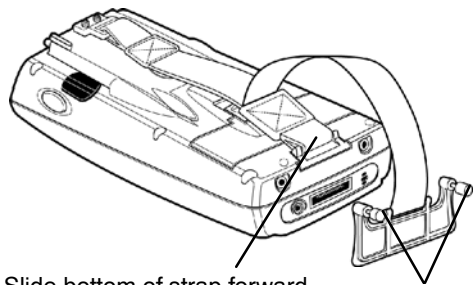

Slide bottom of strap forward to release from the retaining slot.

Thumb screws



Corporate Headquarters

6001 36th Avenue West
Everett, Washington 98203
U.S.A.

tel 425.348.2600

fax 425.355.9551

www.intermec.com

© 2005 Intermec Technologies Corporation. All rights reserved.

730IS Manual Supplement



P/N: 962-054-124A